

AQUABLAST® BASIC and AQUABLAST® BASIC E

The hand-held floor cleaner is designed for universal use and allows a wide range of applications. The rotating spray bar ensures an optimal cleaning performance.



The Aquablast Basic is controlled by a mechanical (Aquablast Basic) or electrical manual valve (Aquablast Basic E). The chassis has four swivel castors for easy handling. The rear castors can be locked for straight running.

Performance data

500 bar – 30 l/min

1000 bar – 16 l/min

at 500 bar
max. temperature of 95 °C

- Working width: 352 mm
- Suitable for use with 4 nozzles, type A, B, M
- Ergonomic hand valve with relief lever
- Adjustable position of the handles
- Optional hose connections: M 22 x 1,5 DKO or M 24 x 1,5 DKO
- Height of the drawbar individually adjustable
- Splash guard via installed brush
- High-pressure hose between handle and swivel connection
- Electric hand valves optionally available

Hammelmann GmbH

Carl-Zeiss-Straße 6–8
59302 Oelde • Germany
mail@hammelmann.de

Tel.: (0) 25 22 / 76 - 0
Fax: (0) 25 22 / 76 - 140
www.hammelmann.com


HAMMELMANN®

AQUABLAST® BASIC (E)



Ergonomically adjustable hand valve with safe and easy to operate relief lever for switching mechanical pressure on/off.


Electric manual valve



Aquablast Basic E

The pressure control of the pump is carried out electrically by the control cable.

Mechanical manual valve



Aquablast Basic

On-site connection:
M 22 x 1,5 i
Hose connection:
M 22 x 1,5 DKO (optional)
M 24 x 1,5 DKO (optional)




Suitable for holding 4 nozzles



High-pressure hose between handle and swivel connection

Splash guard via installed brush

Working width: 352 mm

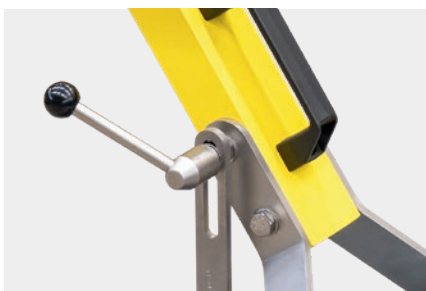

Height of the drawbar individually adjustable

